


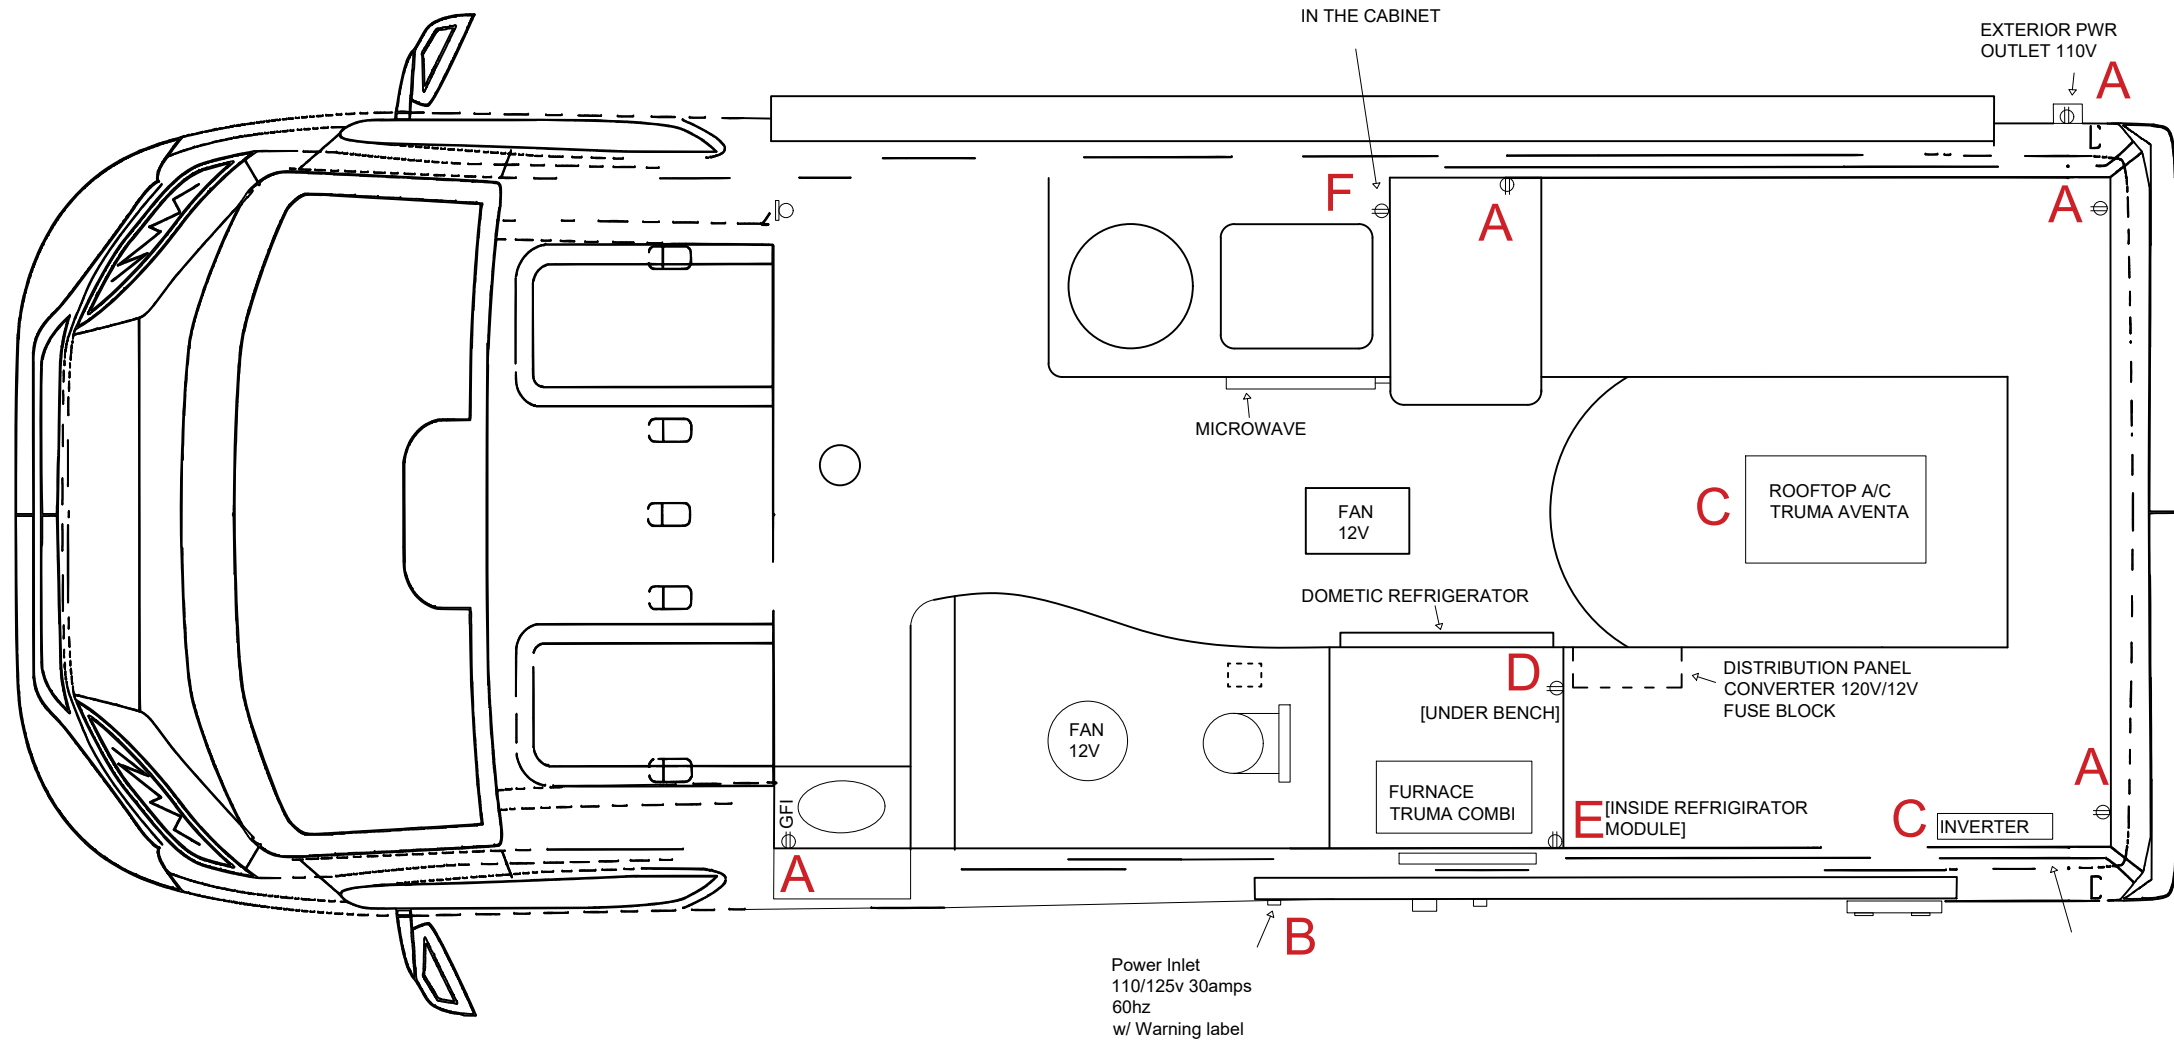

NOTES: CONVERTER SPECS: Input: 105-130VAC 50/60Hz 1,000 Watts Output: 13.6-14.6 VDC 60 Amps  
INVERTER SPECS: TruePower Plus 2000PS 07200 2000 W 12 VDC Input 115 VAC 30 Amps Pure Sine Wave  
POWER CORD: 25' POWERCORD PLUS 125V 30AMP CSA

<< ALL GROUND ARE LINKED TO VEHICLE BODY & TERMINAL BLOCK >>

DRAWING#:FB21-AC002

DATE: 12-03-2024

REV : Steve Kenney

MONTECARLO - FB21

3720 Pascal-Gagnon Terrebonne QC J6X 4J2

TEL: 450-914-0033

FAX: 450-918-9300

WS: www.GalaRV.com



|         |       |      |           |                                              |
|---------|-------|------|-----------|----------------------------------------------|
| B       | 120   | 30A  | 10/3      | PWR Inlet/Shore line 120V 301EL-B.RV.BL      |
| C       | 120   | 20A  | 12/3      | AC TRUMA AVENTA BK 44400-54                  |
| C       | 120   | 30A  | 10/3      | INVERTER TRUE POWER 2000PS                   |
| E       | 120   | 15A  | 14/3      | REFRIGERATOR DOMETIC RMD10.5XT 1876.68 BTU/H |
| D       | 120   | 20A  | 12/3      | TRUMA COMBI / TRUMA OUTLET                   |
| A       | 120   | 15A  | 14/3      | VANITY/ GFI-GTFR1 RECEPT                     |
| A       | 120   | 15A  | 14/3      | KITCHEN OUTLET                               |
| F       | 120   | 15A  | 14/3      | MICROWAVE                                    |
| A       | 120   | 15A  | 14/3      | REAR LEFT OUTLET                             |
| A       | 120   | 15A  | 14/3      | REAR RIGHT OUTLET                            |
| A       | 120   | 15A  | 14/3      | EXTERIOR OUTLET                              |
| CIRCUIT | VOLTS | AMPS | WIRE SIZE | GENERAL                                      |