


[TO DC001 & DC002]

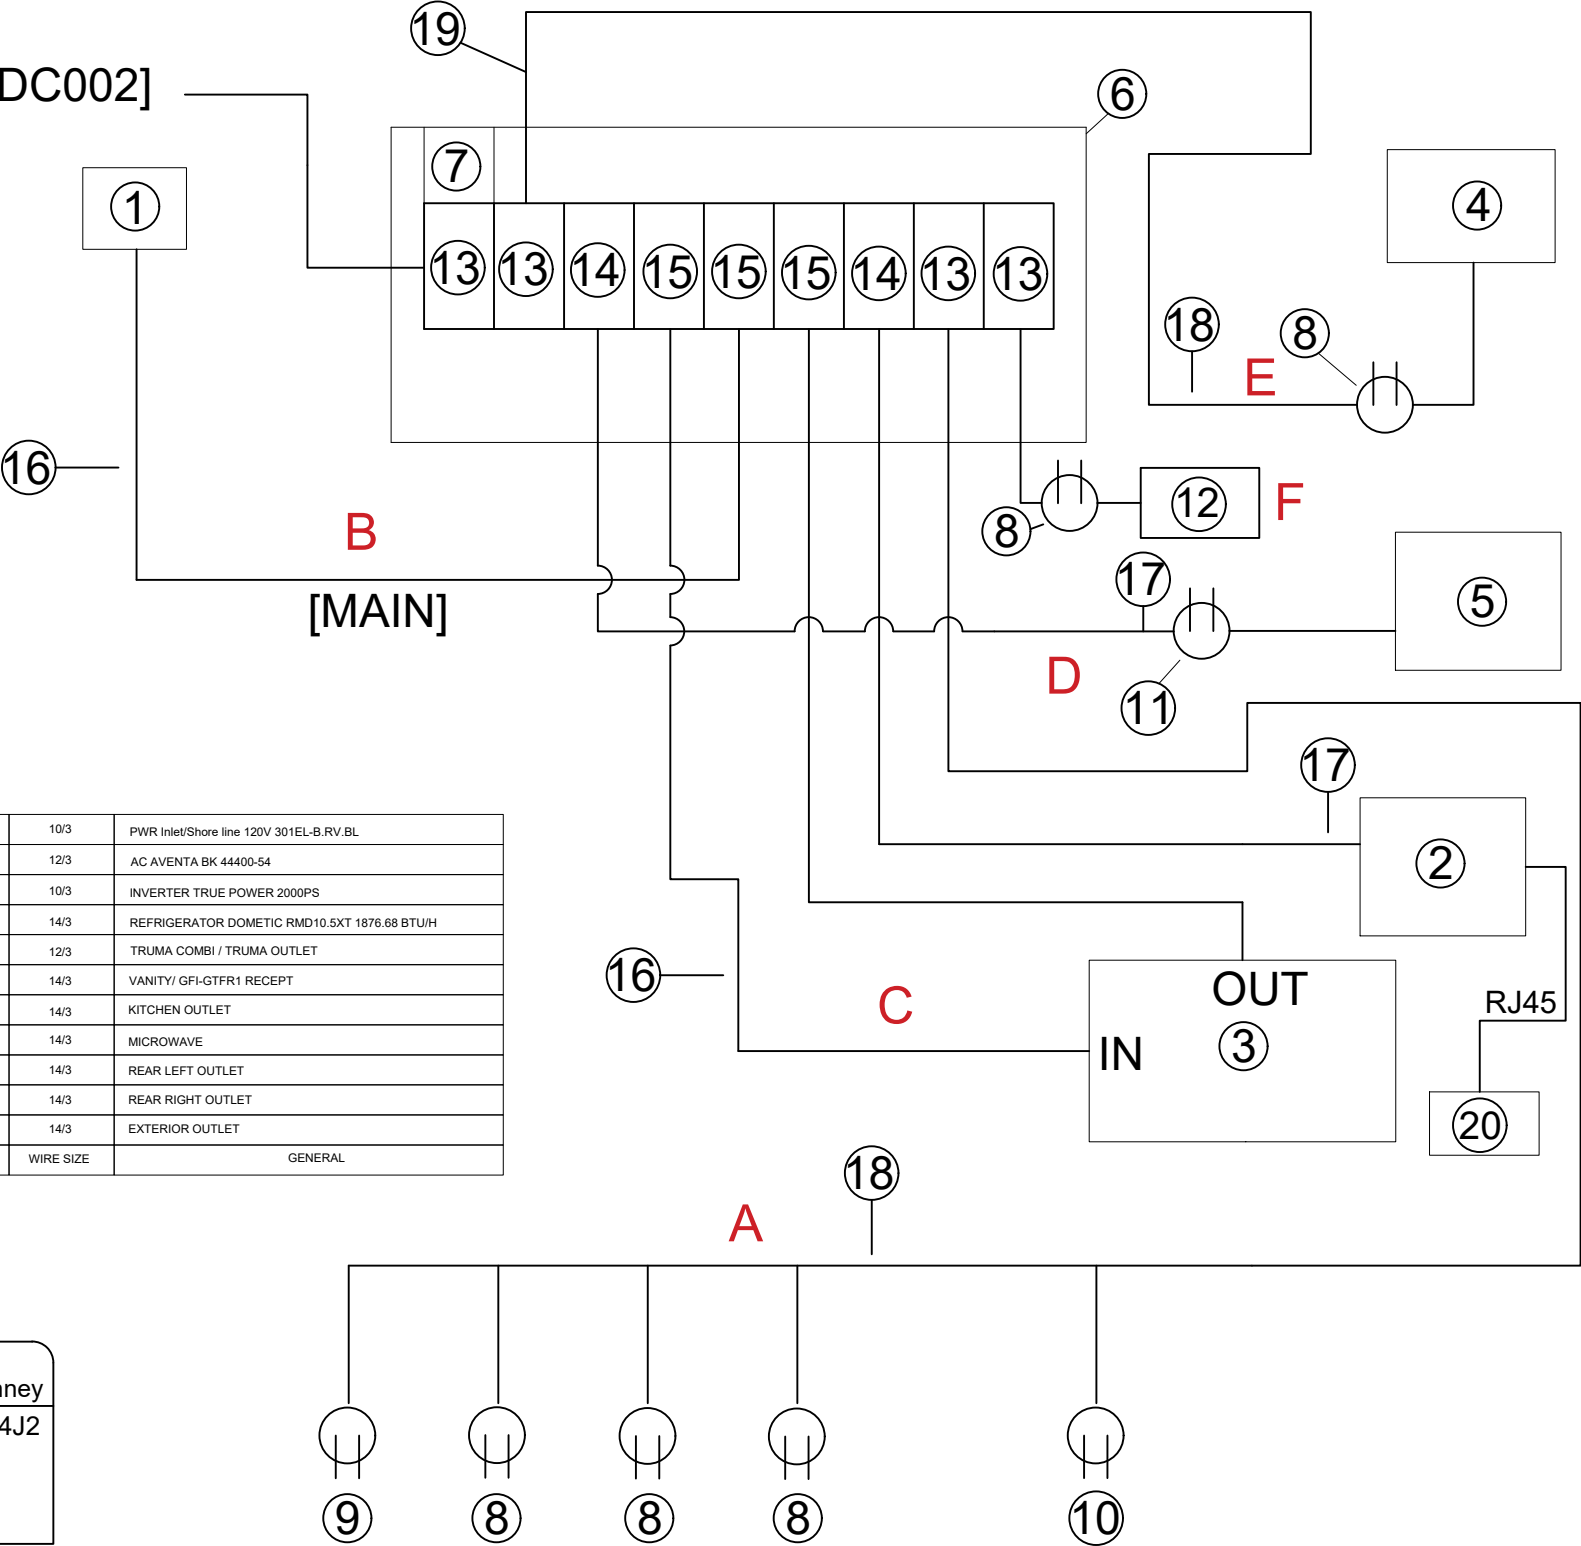

NOTES: CONVERTER SPECS: Input: 105-130VAC 50/60Hz 1,000 Watts Output: 13.6-14.6 VDC 60 Amps  
INVERTER SPECS: TruePower Plus 2000PS 07200 2000 W 12 VDC Input 115 VAC 30 Amps Pure Sine Wave

<< ALL GROUND ARE LINKED TO VEHICULE BODY & TERMINAL BLOCK >>

|    |                                                               |
|----|---------------------------------------------------------------|
| 1  | SHORE LINE INLET 120V - 30A - 304EL-B.RV.BL                   |
| 2  | A/C TRUMA AVENTA 44400-54                                     |
| 3  | INVERTER TRUE POWER 2000PS #07200 - 2000W                     |
| 4  | REFRIGIRATOR DOMETIC RMD10.5XT 1876.68 BTU/H                  |
| 5  | FURNACE TRUMA COMBI                                           |
| 6  | CONVERTER PROGRESSIVE DYNAMIC PD4560                          |
| 7  | CONVERTER'S CHARGER                                           |
| 8  | OUTLET LEVITON LEV5325W                                       |
| 9  | OUTLET W/ CHARGER LEVITON T5633-756-2BW                       |
| 10 | OUTLET LEVITON GFTR1-W GFI                                    |
| 11 | OUTLET FOR TRUMA LEVITON LEVDR20W                             |
| 12 | MICROWAVE                                                     |
| 13 | BREAKER 15A SIEMENS TYPE QT 60HZ 120/240 - Q1515NC 1 POLE     |
| 14 | BREAKER 20A LUMEN TYPE QT 60HZ 120/240 - SIEQ120 1 POLE       |
| 15 | BREAKER 30A LUMEN TYPE QT 60HZ 120/240 - SIEQ130 1 POLE       |
| 16 | WIRE 10/3 AWG TINNED COPPER TRIPLE WIREX #131150 ANCOR MARINE |
| 17 | WIRE 12/3 AWG TINNED COPPER TRIPLE WIREX #131370 ANCOR MARINE |
| 18 | WIRE 14/3 AWG TINNED COPPER TRIPLE WIREX #131590 ANCOR MARINE |
| 19 | WIRE 14 - INCLUDED WITH THE CONVERTER                         |
| 20 | MONITOR CP PLUS TRUMA                                         |

|         |       |      |           |                                              |
|---------|-------|------|-----------|----------------------------------------------|
| B       | 120   | 30A  | 10/3      | PWR Inlet/Shore line 120V 301EL-B.RV.BL      |
| C       | 120   | 20A  | 12/3      | AC AVENTA BK 44400-54                        |
| C       | 120   | 30A  | 10/3      | INVERTER TRUE POWER 2000PS                   |
| E       | 120   | 15A  | 14/3      | REFRIGIRATOR DOMETIC RMD10.5XT 1876.68 BTU/H |
| D       | 120   | 20A  | 12/3      | TRUMA COMBI / TRUMA OUTLET                   |
| A       | 120   | 15A  | 14/3      | VANITY/ GFI-GTFR1 RECEPT                     |
| A       | 120   | 15A  | 14/3      | KITCHEN OUTLET                               |
| F       | 120   | 15A  | 14/3      | MICROWAVE                                    |
| A       | 120   | 15A  | 14/3      | REAR LEFT OUTLET                             |
| A       | 120   | 15A  | 14/3      | REAR RIGHT OUTLET                            |
| A       | 120   | 15A  | 14/3      | EXTERIOR OUTLET                              |
| CIRCUIT | VOLTS | AMPS | WIRE SIZE | GENERAL                                      |

DRAWING#:FB21-AC001

DATE: 12-03-2024

REV : Steve Kenney

MONTECARLO - FB21

3720 Pascal-Gagnon Terrebonne QC J6X 4J2

TEL: 450-914-0033

FAX: 450-918-9300

WS: www.GalaRV.com

